



	X20J Plus	X26J Plus
Working Height w 230 kg capacity	20.05 m	25.60 m
Platform Height w 230 kg capacity	18.05 m	23.60 m
Horizontal Outreach (Std Platform w 230kg)	9.20 m	13.10 m
Working Outreach (Std Platform w 230kg)	9.85 m	13.75 m
Up & Over Height w 230 kg	8.2 m	10.10 m
Swing (non continuous)	360°	360°
Jib - overall length	1.68 m	1.68 m
Jib - range of articulation (+/-)	89° (+0/-89°)	89° (+0/-89°)
Platform size (standard 2 persons)	0.69 m x 1.34 m	0.69 m x 1.34 m
Platform size (narrow one person)	0.59 m x 0.79 m	0.59 m x 0.79 m
Stowed width (with std. 2P platform)	1.48 m	1.48 m
A. Stowed width (without platform)	0.795 m	0.99 m
B. Stowed height (on tracks)	1.99 m	1.99 m
Stowed length (on tracks) with Basket	5.00 m	6.35 m
Stowed length (on tracks) without Basket	4.67 m	5.99 m
Outrigger footprint	2.92 m x 2.93 m	4.08 m x 3.98 m
Machine weight (with standard platform)	2,840 kg ¹	-
Operating weight (with engine)	2,880 kg ¹	4,365 kg ¹
Maximum ground bearing pressure (on outriggers)	3.10 kg/cm²	4.51 kg/cm²
Maximum ground bearing pressure (on tracks)	0.65 kg/cm²	0.54 kg/cm²
Maximum drive speed (single speed m/c) Petrol	1.3 km/h	-
Maximum drive speed (two speed m/c) Petrol	2.5 km/h	2.4 km/h
Gradeability	28%	28%
Maximum operating slope	12°	12°
Max. Approach / Depart angles	20°	Front 22° / Rear 25°
Track size - McLaren low profile black rubber	1.46 m x 0.2 m x 0.35 m	—
Track size - Bridgestone high profile black rubber	—	1.76 m x 0.23 m x 0.38 m
Width of Undercarriage (Retracted/Extended)	0.79 m / 1.09 m	0.99 m / 1.49 m
AC electric motor	2.2 KW 50Hz 230V	110V or 220V, 50Hz, 2.2kW
Engine	Honda iGX440, 11 kw Petrol	Kubota D902, 16 kw Diesel



¹ Certain options or country standards may increase weight and/or dimensions.



JLG Model X20J Plus

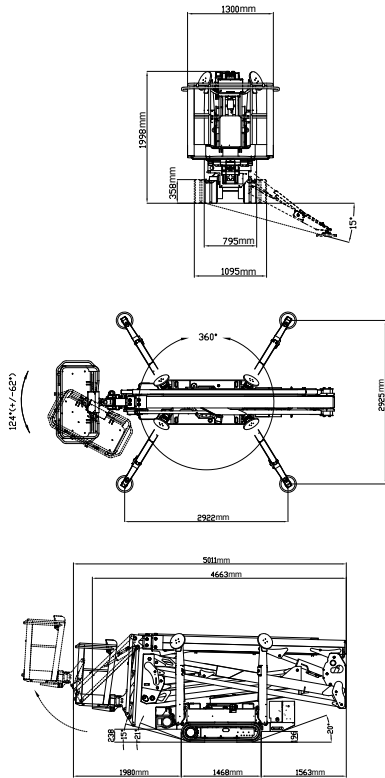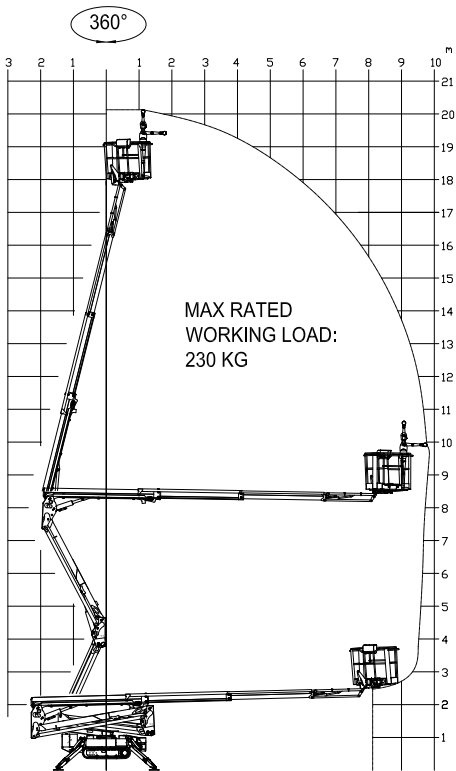

JLG Model X26J Plus

