

JCPT(HD)

Self-Propelled Scissor Lifts (Hydraulic Motor Drive)



dL Dingli

JCPT2212HD


	S.W.L	450kg
	S.W.L On Extension	113kg
	Max.Occupants	2
	A Max. Working Height	22.00m
	B Max. Platform Floor Height	20.00m
	C Overall Length	4.50m
	D Overall Width	1.22m
	E Overall Height(Rails Up)	3.73m
	Overall Height(Rails Down)	2.90m
	Platform Size(Length/Width F)	3.98m×1.19m
	G Platform Extension Size	1.50m
	Ground Clearance(Stowed)	0.19m
	Ground Clearance(Raised)	0.025m
	Wheelbase	3.20m
	Turning Radius(Inside/Outside)	0.33m/3.64m
	Drive/Lifting Motor	48V/8kW
	Travel Speed(Stowed)	1.5km/h
	Travel Speed(Raised)	0.15km/h
	Up/Down Speed	120/90sec
	Gradeability	25%
	Max. Working Slope(Inside/Outside)	1.5°/0.3°
	Batteries	48V/560Ah
	Integrated Charger	48V/50A
	Tyres	22×9-16
	Weight	9755kg

Standard Equipment

- Proportional Controls
- Self-lock Gate On Platform
- Automatic Pothole Protection
- Onboard Diagnostic System
- Non Marking Tyre
- Automatic Brake System
- Emergency Lowering System
- Emergency Stop Button
- Cylinder Holding Valve
- Extended Platform
- Horn
- Automatic Leveling Hydraulic Outriggers
- Charger Protection
- All Motion Alarm
- 2WD
- Safety Brackets
- Hour Meter
- Flashing Beacon
- Tilt Sensor With Alarm
- Folding Guardrails

Options

- Overload Sensor With Alarm
- AC Power To Platform
- Platform Work Lights
- Airline To Platform

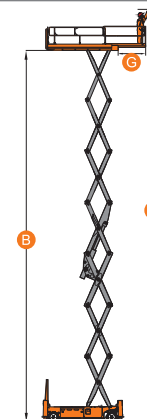

Pothole Device



Compact Turning Radius



Automatic Leveling
Outriggers



Emergency Lowering System



Removeable Battery Cover



Platform Control



Folding Guardrails



Safety Bracket