



	15MVL	20MVL
Working Height	6.71 m	7.98 m
Platform Height	4.71 m	5.98 m
Max Drive Height	4.71 m	5.98 m
Stowed Height	1.98 m	1.98 m
Platform Entry Height	0.46 m	0.46 m
Platform Entry Height Stock Picking Platform	0.43 m	0.43 m
Platform Entry Height Extension Platform	—	—
Platform Capacity - Side Entry Platform	—	115 kg
Material Tray Capacity	—	45 kg
Platform Capacity - Stockpicking Platform	230 kg	160 kg
Platform Capacity - Narrow Platform	230 kg	160 kg
Platform Capacity - Extension Platform	230 kg	160 kg
Platform Size - Side Entry with Material Tray	—	0.69 m x 0.58 m
Material Tray Size (W x L)	—	0.69 m x 0.58 m
Platform Size - Stockpicking Platform (W x L)	0.71 m x 1.22 m	0.71 m x 1.22 m
Platform Size - Narrow Platform (W x L)	0.56 m x 0.64 m	0.56 m x 0.64 m
Platform Size - Extension Platform Retracted (W x L)	0.66 m x 0.66 m	0.66 m x 0.66 m
Platform Size - Extension Platform Extended (W x L)	0.66 m x 1.24 m	0.66 m x 1.24 m
Vehicle Length - Extension Platform Retracted	1.36 m	1.36 m
Vehicle Length - Stock Picking Platform	1.88 m	1.88 m
Vehicle Length - All other Platforms	1.36 m	1.36 m
Vehicle Width - Chassis Width	0.75 m	0.75 m
Vehicle Width - Extension Platform	0.82 m	0.82 m
Vehicle Width - Stock Picking Platform	0.80 m	0.80 m
Vehicle Width - All Other Platforms	0.75 m	0.75 m
Machine weight - All Other Platforms ¹	1,060 kg	1,060 kg
Machine weight - Extension Platform ¹	1,090 kg	1,090 kg
Machine weight - Stock Picking Platform ¹	1,110 kg	1,110 kg
Maximum Ground Bearing Pressure Front Casters	22.60 kg/cm ²	19.50 kg/cm ²
Maximum Ground Bearing Pressure Rear Wheels	8.10 kg/cm ²	9.21 kg/cm ²
Drive Maximum Speed - Platform Lowered	5.4 km/h	5.4 km/h
Drive Maximum Speed - Platform Elevated	0.8 km/h	0.8 km/h
Turning Radius	Zero	Zero
Gradeability	20%	20%
Ground Clearance	5 cm	5 cm
Wheel Diameter - Rear Drive & Steer Wheels	32 cm x 10 cm	32 cm x 10 cm
Wheel Diameter - Front Castor Wheels	20 cm x 6 cm	20 cm x 6 cm
Tyre Material	Non-marking	Non-marking
Batteries	Maintenance-Free 100A/hr AGM (x 2)	Maintenance-Free 100A/hr AGM (x 2)

JLG MVL Series

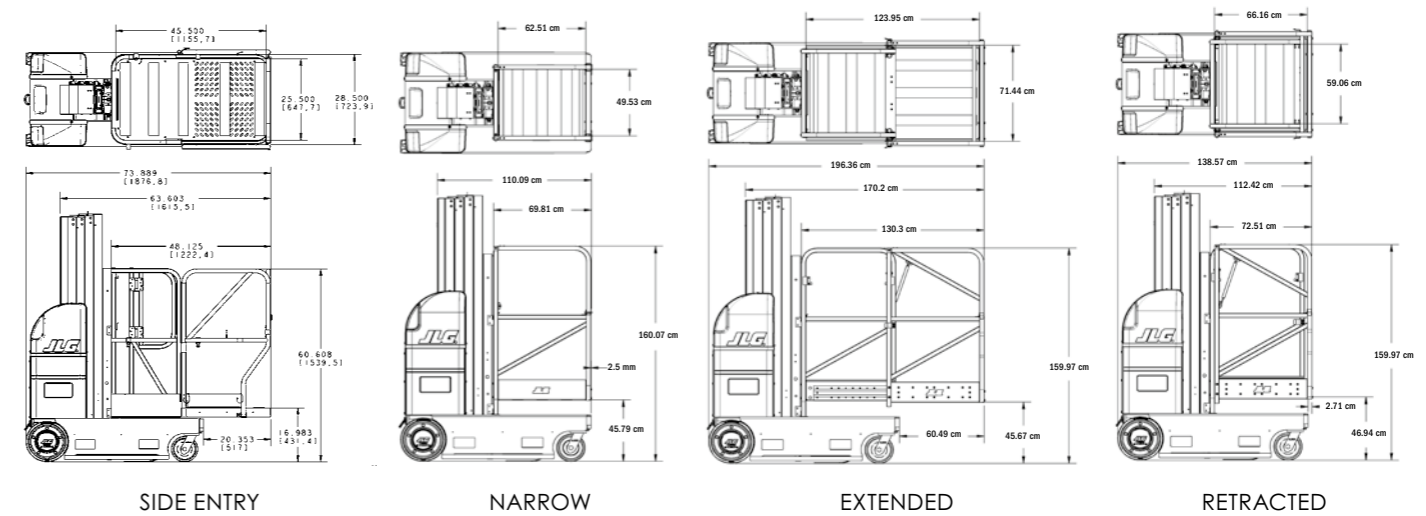

¹ Certain options or country standards may increase weight and/or dimensions.

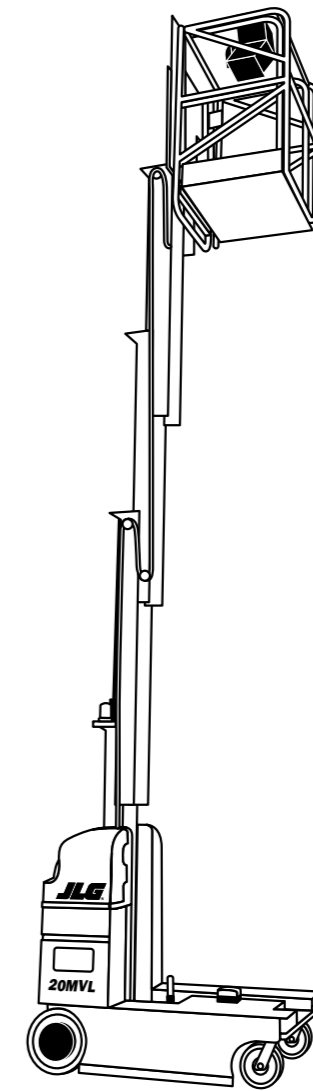