


## STANDARD 2.5 TONNE FORKLIFT VS JCB TELETRUK LOGISTICS MODELS

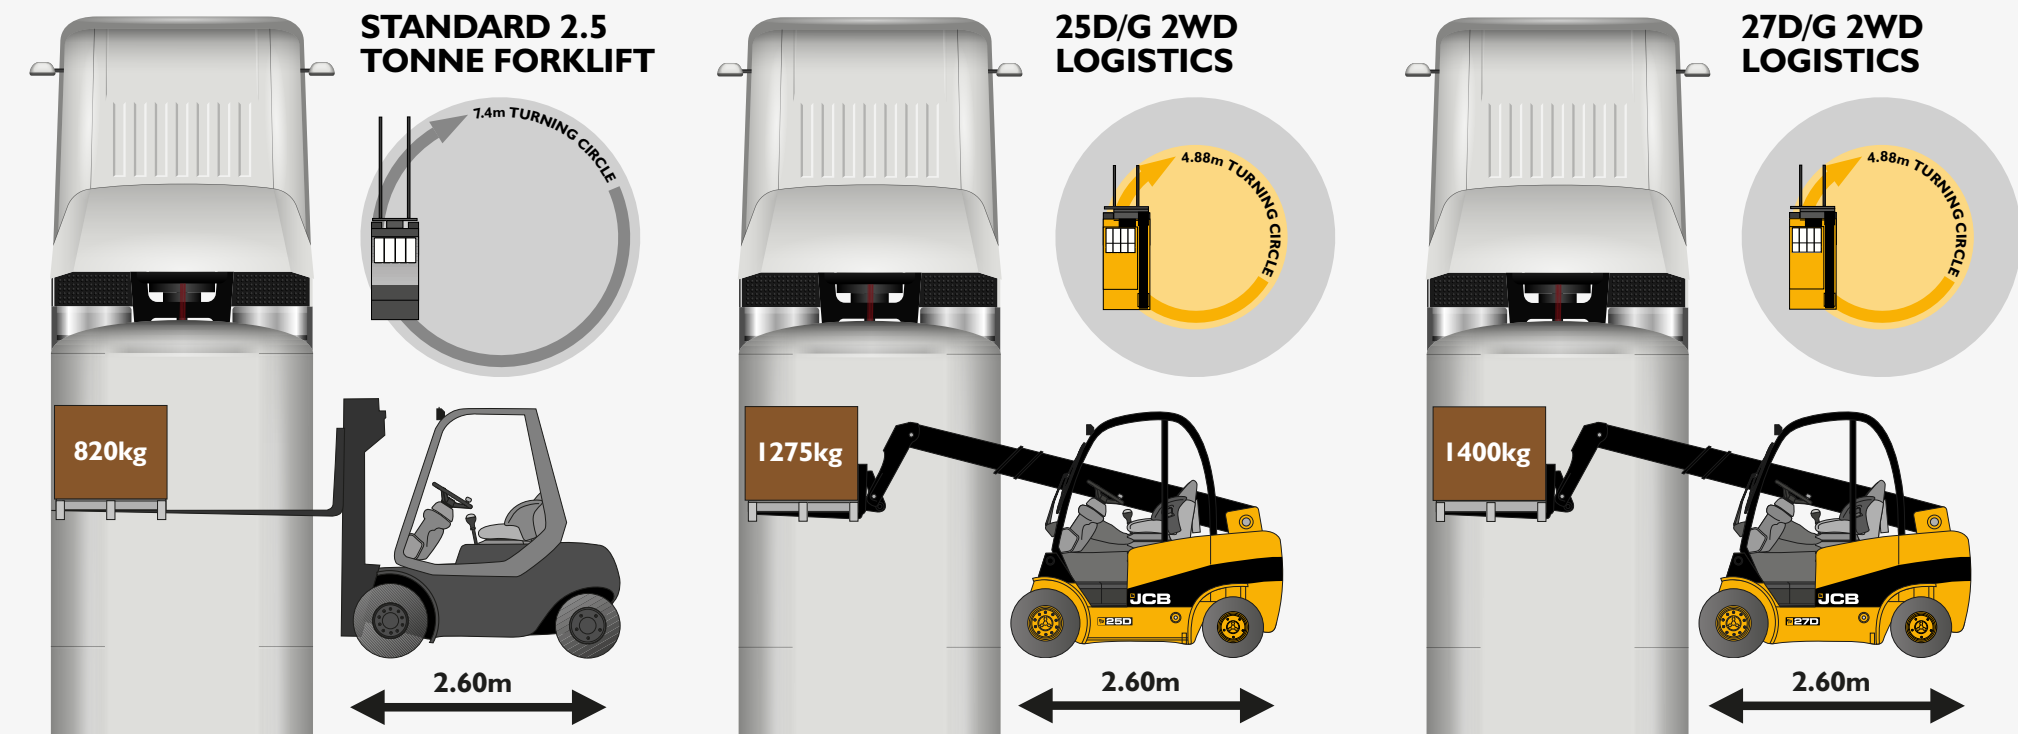

JCB TELETRUK SPECIFICATIONS		25D 2WD LOGISTICS	25G 2WD LOGISTICS	27D 2WD LOGISTICS	27G 2WD LOGISTICS	30D 2WD LOGISTICS	30G 2WD LOGISTICS	30D HL 2WD LOGISTICS	35D 2WD LOGISTICS
Maximum lift capacity	kg	2500	2500	2700	2700	3000	3000	3000	3500
Capacity @ 2m forwards reach	kg	1275	1275	1400	1400	1750	1750	2000	2100
Maximum lift height	mm	4000	4000	4000	4000	4000	4000	5150	4400
Maximum forward reach	mm	2390	2390	2390	2390	2390	2390	3300	2430
Turning radius	mm	2440	2440	2440	2400	2490	2490	2885	2885
Aisle width 90 degree stacking	mm	3940	3940	3940	3940	4005	4005	4475	4480
Overall height (container ready)	mm	2190	2190	2190	2190	2205	2205	2205	2205
Overall width	mm	1175	1175	1175	1175	1280	1280	1280	1280
Unladen weight	kg	4220	4280	4340	4400	4900	4900	5380	5100
Carriage rotation	degrees	111	111	111	111	111	111	111	111
Auxiliary flow rates (low/high)	l/min	28/70	28/70	28/70	28/70	28/70	28/70	28/70	28/70
Negative lift	mm	350	350	350	350	350	350	400	350